

# Plaka Stabox Technical

Calculation of shearing forces at the construction joints



Calculation compliant  
with NBN EN 1992-1-1  
and the National Belgian  
annex (ANB)

# Leviat®

We imagine, model and make engineered products and innovative construction solutions that help turn architectural visions into reality and enable our construction partners to build better, safer, stronger and faster.

**Leviat is a world leader in connecting, fixing, lifting and anchoring technology.**


From the build of new schools, hospitals, homes and infrastructure, to the repair and maintenance of heritage structures, our engineering skills are making a difference around the world.

We provide technical design assistance at every stage of a project, from initial planning to installation and beyond.

Our technical support services range from simple product selection through to the development of a fully customised project-specific design solution.

Every promise we make locally, has the commitment and dedication of our global team behind it. We employ almost 3,000 people at 60 locations across North America, Europe and Asia-Pacific, providing an agile and responsive service worldwide.



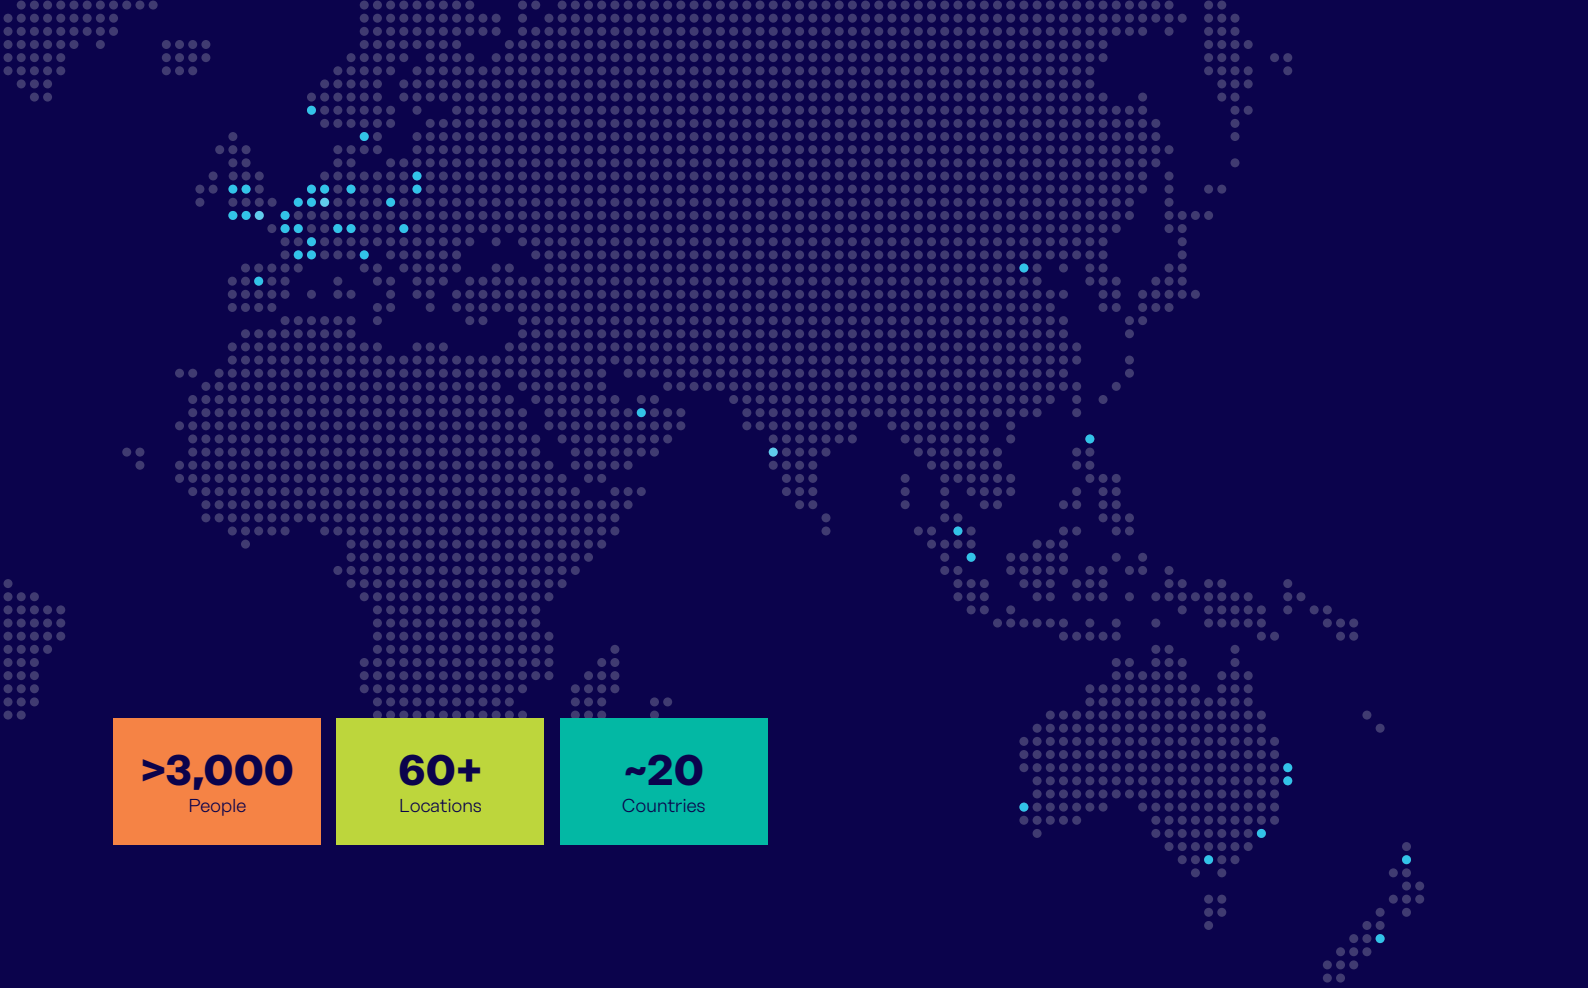


**>3,000**  
People

**60+**  
Locations


**~20**  
Countries

**Our areas of expertise:**



**Structural Connections**

Systems to form robust, efficient connections, and continuity of concrete reinforcement as necessary, between walls, slabs, columns, beams and balconies, providing structural integrity as well as enhanced thermal and acoustic performance.




**Lifting & Bracing**

Systems for the safe and efficient transportation, lifting and temporary bracing of cast concrete elements and tilt-up panels before permanent structural connections are made.



**Façade Support & Restraint**

Systems for the safe and thermally-efficient fixing of the external building envelope, including brick and natural stone, insulated sandwich panels, curtain walling and suspended concrete façades, and also the repair and strengthening of existing masonry installations.




**Anchoring & Fixing**

Systems for fixing secondary fixtures to concrete, including anchor channels, bolts and inserts; also tension rod systems for roofs and canopies.



**Formwork & Site Accessories**

Non-structural accessories that complement our engineered solutions and help keep your construction environment operating safely and efficiently, including moulds for casting standard and special concrete elements and construction essentials such as reinforcing bar spacers.



**Industrial Technology**

Mounting channels, pipe clamps and other versatile framing systems that provide safe fixing in a wide range of industrial applications.


**Leviat product ranges:**

Ancon | Aschwanden | Connolly | Halfen | Helifix | Isedio | Meadow Burke | Modersohn | Moment | Plaka | Scaldex | Thermomass

## Stabox Type D

The STABOX standby box is calculated in compliance with Eurocode 2 (NBN EN 1992-1-1) and the Belgian National Annex (ANB). This calculation differentiates the shearing force perpendicular to the construction joint (slab-shell link), where the static height "d" impacts the load capacity, and the shearing force parallel to the construction joint (shell-shell link) where the surface of the joint is totally rough. B500B reinforcement (with AFCAB, BENOR and KIWA certificates) after folding and unfolding remains compliant with the standards without having to reduce the shearing force capacity.

### Shearing force perpendicular to the joint

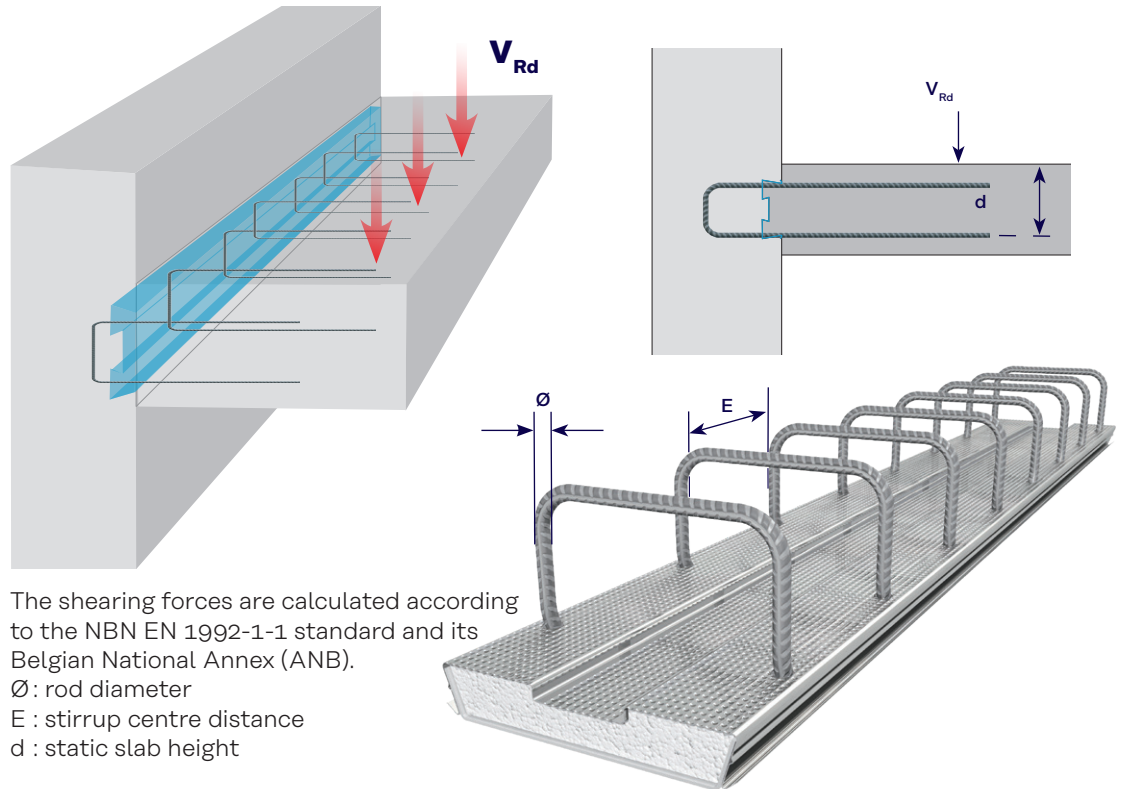

The shearing forces are calculated according to the NBN EN 1992-1-1 standard and its Belgian National Annex (ANB).  
 $\emptyset$  : rod diameter  
 E : stirrup centre distance  
 d : static slab height

$V_{Rd}$  (kN/m)




C25/30									
$\emptyset$ (mm)	E (mm)	d=120 mm	d=130 mm	d=140 mm	d=150 mm	d=160 mm	d=170 mm	d=180 mm	d=190 mm
6	200	41,28	43,55	45,75	47,90	50,01	52,07	54,10	56,08
6	240	38,85	40,98	43,05	45,08	47,06	49,00	50,91	52,77
8	150	55,04	58,06	61,00	63,87	66,68	69,43	72,13	74,77
8	200	50,01	52,75	55,42	58,03	60,58	63,08	65,53	67,94
8	240	47,06	49,64	52,16	54,61	57,01	59,36	61,67	63,93
10	150	63,87	67,37	70,79	74,12	77,38	80,57	83,70	86,77
10	200	58,03	61,21	64,31	67,34	70,30	73,20	76,04	78,83
12	150	72,13	76,08	79,93	83,70	87,38	90,98	94,51	97,98
12	200	65,53	69,12	72,62	76,04	79,39	82,66	85,87	89,02

C25/30								
$\emptyset$ (mm)	E (mm)	d=200 mm	d=210 mm	d=220 mm	d=230 mm	d=240 mm	d=250 mm	d=260 mm
6	200	58,03	59,23	60,40	61,55	62,68	63,79	64,87
6	240	54,61	55,74	56,84	57,92	58,98	60,02	61,05
8	150	77,38	78,97	80,53	82,07	83,57	85,05	86,50
8	200	70,30	71,75	73,17	74,56	75,93	77,27	78,59
8	240	66,16	67,52	68,85	70,16	71,45	72,71	73,96
10	150	89,79	91,64	93,45	95,23	96,97	98,69	100,37
10	200	81,58	83,26	84,91	86,52	88,11	89,66	91,20
12	150	101,39	103,48	105,53	107,54	109,51	111,44	113,35
12	200	92,12	94,02	95,88	97,70	99,49	101,25	102,98



## Stabox Type D

### Shearing force perpendicular to the joint

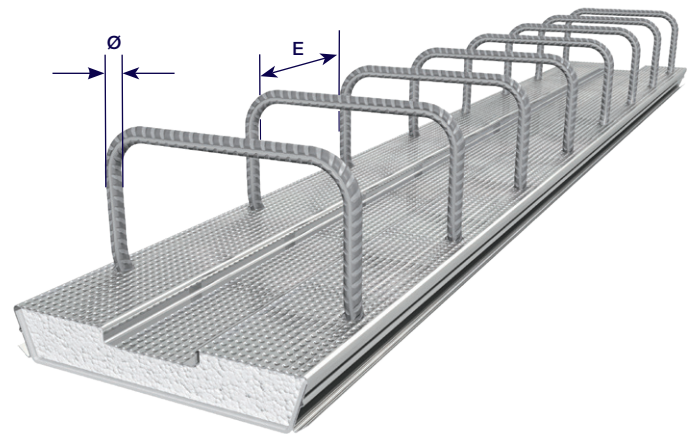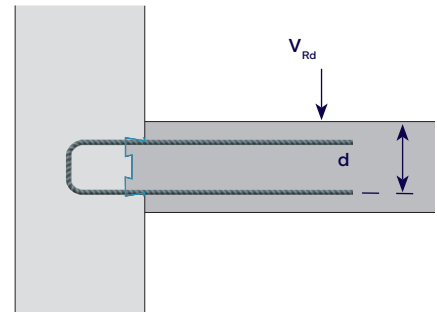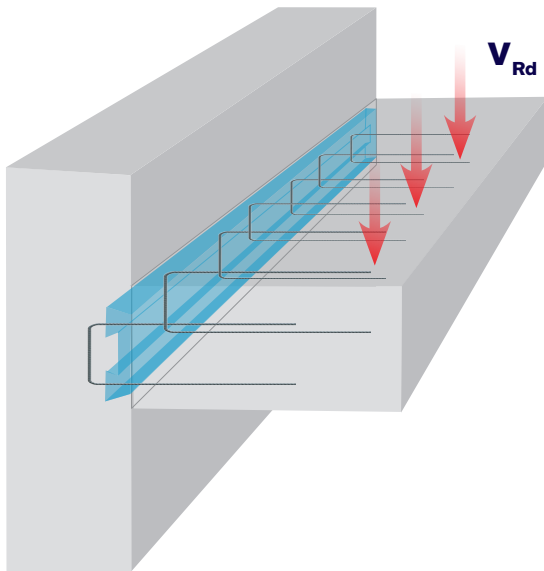

The shearing forces are calculated according to the NBN EN 1992-1-1 standard and its Belgian National Annex (ANB).

Ø : rod diameter

E : stirrup centre distance

d : static slab height


$V_{Rd}$  (kN/m)

C30/37									
Ø (mm)	E (mm)	d=120 mm	d=130 mm	d=140 mm	d=150 mm	d=160 mm	d=170 mm	d=180 mm	d=190 mm
6	200	43,87	46,27	48,62	50,91	53,14	55,34	57,48	59,59
6	240	41,28	43,55	45,75	47,90	50,01	52,07	54,10	56,08
8	150	58,49	61,70	64,82	67,87	70,86	73,78	76,65	79,46
8	200	53,14	56,06	58,90	61,67	64,38	67,03	69,64	72,19
8	240	50,01	52,75	55,42	58,03	60,58	63,08	65,53	67,94
10	150	67,87	71,59	75,22	78,76	82,22	85,62	88,94	92,20
10	200	61,67	65,05	68,34	71,56	74,71	77,79	80,81	83,77
12	150	76,65	80,85	84,94	88,94	92,85	96,68	100,44	104,12
12	200	69,64	73,45	77,18	80,81	84,36	87,84	91,25	94,60

C30/37								
Ø (mm)	E (mm)	d=200 mm	d=210 mm	d=220 mm	d=230 mm	d=240 mm	d=250 mm	d=260 mm
6	200	61,67	62,94	64,18	65,41	66,60	67,78	68,94
6	240	58,03	59,23	60,40	61,55	62,68	63,79	64,87
8	150	82,22	83,92	85,58	87,21	88,81	90,38	91,92
8	200	74,71	76,25	77,75	79,23	80,69	82,11	83,51
8	240	70,30	71,75	73,17	74,56	75,93	77,27	78,59
10	150	95,41	97,38	99,31	101,20	103,05	104,87	106,66
10	200	86,69	88,47	90,23	91,94	93,63	95,28	96,91
12	150	107,74	109,96	112,14	114,27	116,37	118,43	120,45
12	200	97,89	99,91	101,89	103,82	105,73	107,60	109,43

## Stabox Type D

### Shearing force parallel with the joint

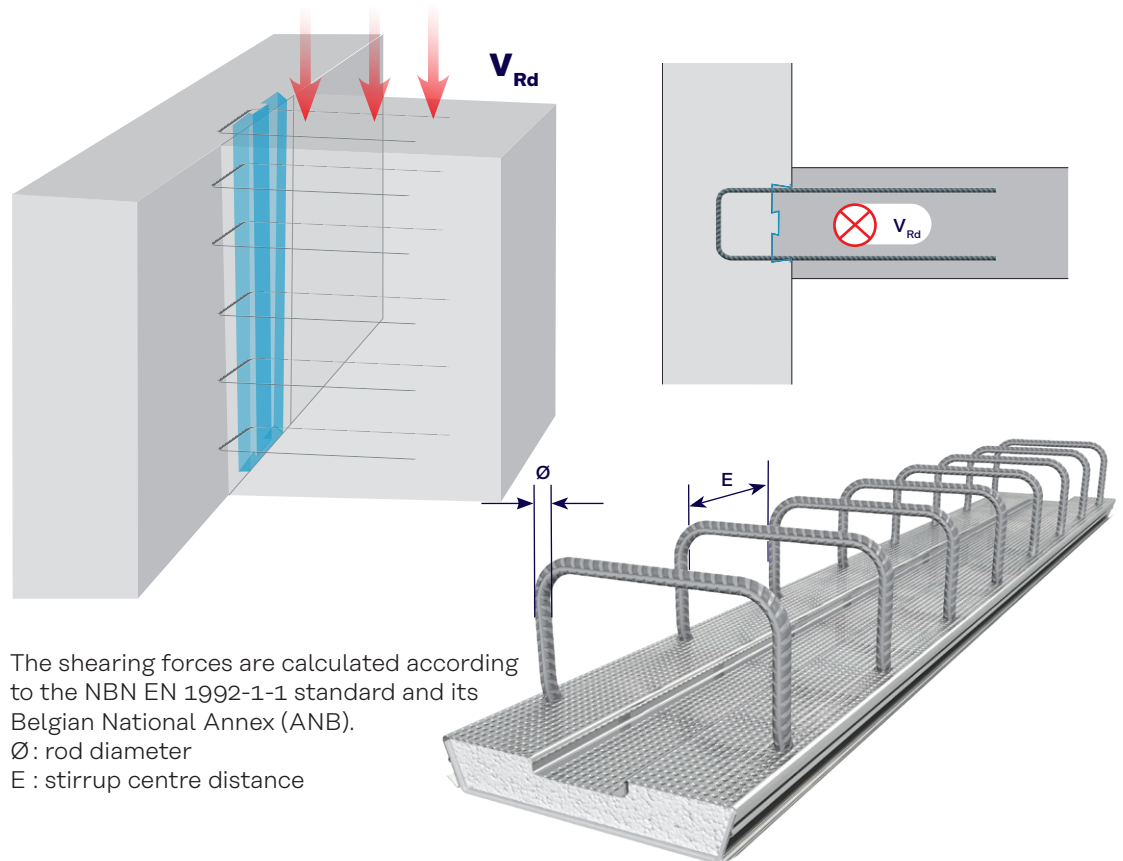



$V_{Rd}$  (kN/m)

		C25/30				
$\varnothing$ (mm)	E (mm)	Type 90D	Type 120D	Type 160D	Type 190 D	Type 230D
6	200	128,89	143,17	-	-	-
6	240	114,55	128,83	-	-	-
8	150	246,82	261,10	280,14	294,42	313,46
8	200	195,82	210,10	229,14	243,42	262,46
8	240	170,32	184,60	-	-	-
10	150	361,55	375,83	394,87	409,15	428,19
10	200	281,87	296,15	315,19	-	348,51
12	150	-	-	535,11	549,39	568,43
12	200	-	-	420,37	434,65	-

		C30/37				
$\varnothing$ (mm)	E (mm)	Type 90D	Type 120D	Type 160D	Type 190 D	Type 230D
6	200	134,65	150,85	-	-	-
6	240	120,31	136,51	-	-	-
8	150	252,58	268,78	290,38	306,58	328,18
8	200	201,58	217,78	239,38	255,58	277,18
8	240	176,08	192,28	-	-	-
10	150	367,31	383,51	405,11	421,31	442,91
10	200	287,63	303,83	325,43	341,63	363,23
12	150	-	-	545,35	561,55	583,15
12	200	-	-	430,61	446,81	-

# Stabox Type S

## Shearing force perpendicular to the joint

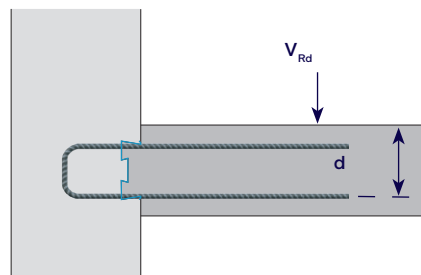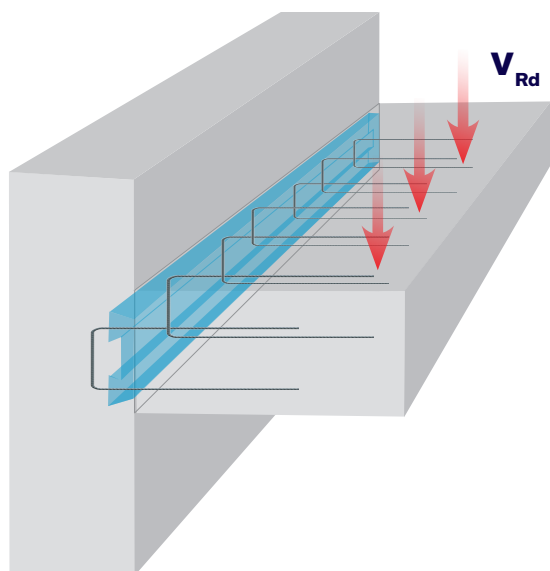


The shearing forces are calculated according to the NBN EN 1992-1-1 standard and its Belgian National Annex (ANB).

Ø : rod diameter

E : stirrup centre distance

d : static slab height

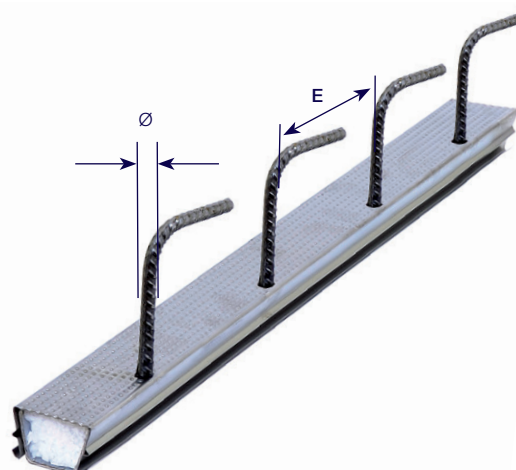


$V_{Rd}$  (kN/m)

C25/30							
Ø (mm)	E (mm)	d=60 mm	d=70 mm	d=80 mm	d=90 mm	d=100 mm	d=110 mm
6	200	26,01	28,82	31,50	34,08	36,56	38,96
6	240	24,47	27,12	29,65	32,07	34,40	36,66
6	300	22,72	25,18	27,52	29,77	31,94	34,03
8	150	34,68	38,43	42,01	45,44	48,74	51,94
8	200	31,50	34,91	38,16	41,28	44,29	47,19
8	240	29,65	32,86	35,91	38,85	41,68	44,41
10	100	46,06	51,05	55,80	60,36	64,75	68,99
10	150	40,24	44,59	48,74	52,73	56,56	60,27
10	200	36,56	40,51	44,29	47,90	51,39	54,76
12	100	52,01	57,64	63,01	68,16	73,12	77,91
12	150	45,44	50,36	55,04	59,54	63,87	68,06
12	200	41,28	45,75	50,01	54,10	58,03	61,84

C30/37							
Ø (mm)	E (mm)	d=60 mm	d=70 mm	d=80 mm	d=90 mm	d=100 mm	d=110 mm
6	200	27,64	30,63	33,48	36,21	38,85	41,40
6	240	26,01	28,82	31,50	34,08	36,56	38,96
6	300	24,14	26,76	29,25	31,64	33,94	36,16
8	150	36,85	40,84	44,64	48,28	51,80	55,20
8	200	33,48	37,10	40,56	43,87	47,06	50,15
8	240	31,50	34,91	38,16	41,28	44,29	47,19
10	100	48,95	54,24	59,29	64,14	68,80	73,32
10	150	42,76	47,39	51,80	56,03	60,11	64,05
10	200	38,85	43,05	47,06	50,91	54,61	58,19
12	100	55,27	61,25	66,96	72,43	77,70	82,79
12	150	48,28	53,51	58,49	63,27	67,87	72,33
12	200	43,87	48,62	53,14	57,48	61,67	65,71

## Stabox Type S

### Shearing force parallel with the joint

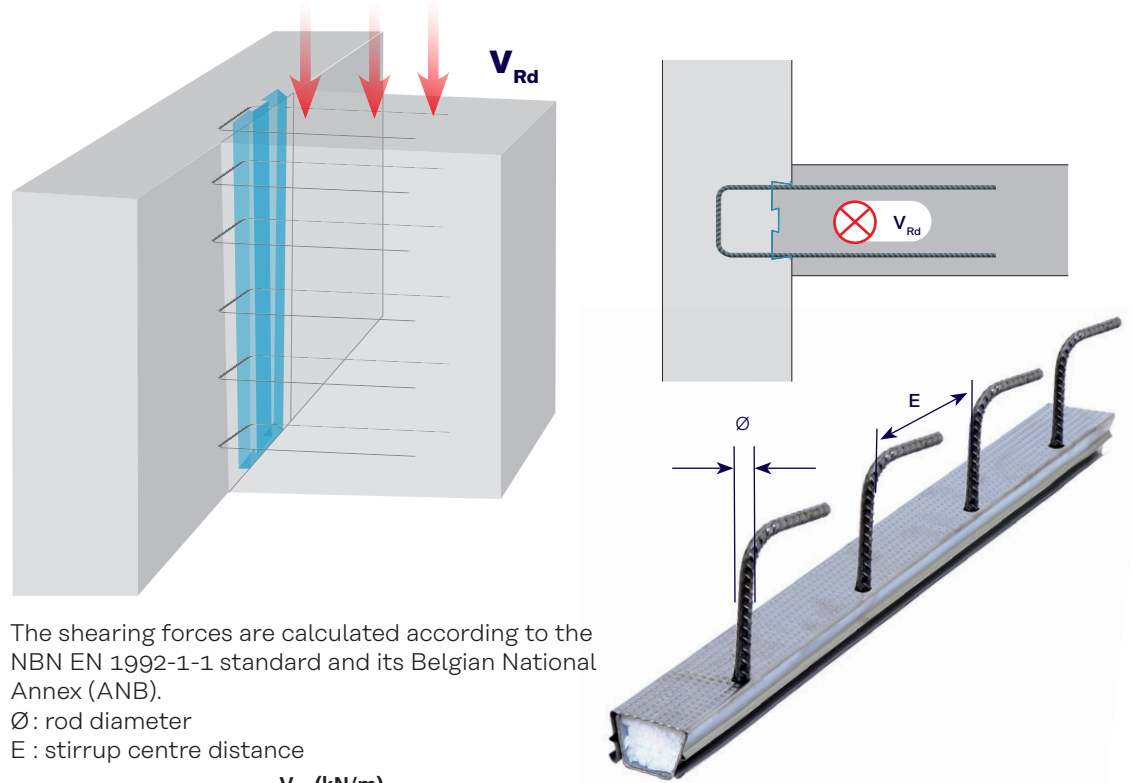

The shearing forces are calculated according to the NBN EN 1992-1-1 standard and its Belgian National Annex (ANB).

Ø : rod diameter

E : stirrup centre distance




$V_{Rd}$  (kN/m)

		C25/30		
Ø (mm)	E (mm)	Type 45S	Type 60S	Type 90S
6	200	64,45	-	-
6	240	57,28	-	-
6	300	50,10	-	-
8	150	123,41	130,55	-
8	200	97,91	105,05	-
8	240	85,16	-	-
10	100	-	267,59	287,63
10	150	180,78	187,92	207,96
10	200	140,94	148,08	-
12	100	-	-	392,81
12	150	202,50	-	278,07
12	200	193,52	-	220,70

		C30/37		
Ø (mm)	E (mm)	Type 45S	Type 60S	Type 90S
6	200	67,33	-	-
6	240	60,16	-	-
6	300	52,98	-	-
8	150	126,29	134,39	-
8	200	100,79	108,89	-
8	240	88,04	-	-
10	100	-	271,43	287,63
10	150	183,66	191,76	207,96
10	200	143,82	151,92	-
12	100	-	-	392,81
12	150	237,60	-	278,07
12	200	196,40	-	220,70

# Stabox Type DS

## Shearing force perpendicular to the joint

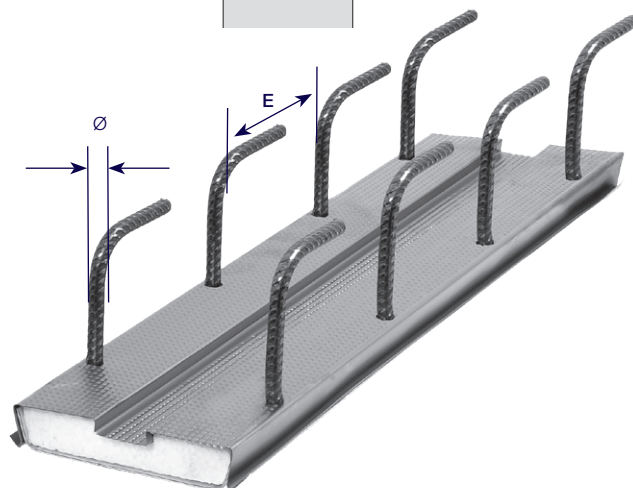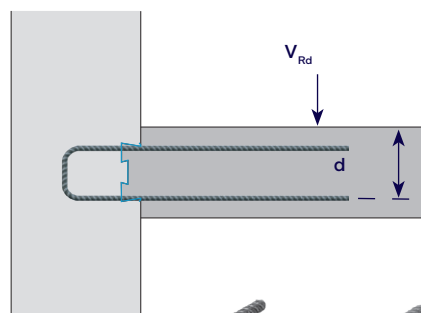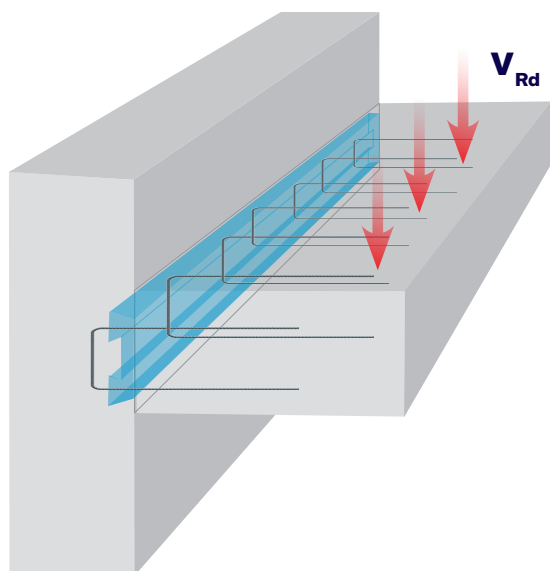

The shearing forces are calculated according to the NBN EN 1992-1-1 standard and its Belgian National Annex (ANB).

Ø : rod diameter

E : stirrup centre distance

d : static slab height

**V<sub>Rd</sub> (kN/m)**

		C25/30							
Ø (mm)	E (mm)	d=130 mm	d=140 mm	d=150 mm	d=160 mm	d=170 mm	d=180 mm	d=190 mm	
10	100	77,12	81,03	84,84	88,57	92,23	95,81	99,32	
10	150	67,37	70,79	74,12	77,38	80,57	83,70	86,77	
12	100	87,09	91,50	95,81	100,02	104,15	108,19	112,16	
12	150	76,08	79,93	83,70	87,38	90,98	94,51	97,98	

		C25/30							
Ø (mm)	E (mm)	d=200 mm	d=210 mm	d=220 mm	d=230 mm	d=240 mm	d=250 mm	d=260 mm	
10	100	102,78	104,90	106,97	109,01	111,01	112,97	114,90	
10	150	89,79	91,64	93,45	95,23	96,97	98,69	100,37	
12	100	116,06	118,46	120,80	123,10	125,35	127,57	129,75	
12	150	101,39	103,48	105,53	107,54	109,51	111,44	113,35	


		C30/37							
Ø (mm)	E (mm)	d=130 mm	d=140 mm	d=150 mm	d=160 mm	d=170 mm	d=180 mm	d=190 mm	
10	100	81,96	86,11	90,16	94,12	98,00	101,81	105,55	
10	150	71,59	75,22	78,76	82,22	85,62	88,94	92,20	
12	100	92,55	97,23	101,81	106,29	110,67	114,97	119,19	
12	150	80,85	84,94	88,94	92,85	96,68	100,44	104,12	

		C30/37							
Ø (mm)	E (mm)	d=200 mm	d=210 mm	d=220 mm	d=230 mm	d=240 mm	d=250 mm	d=260 mm	
10	100	109,22	111,47	113,68	115,84	117,96	120,05	122,10	
10	150	95,41	97,38	99,31	101,20	103,05	104,87	106,66	
12	100	123,34	125,88	128,37	130,81	133,21	135,56	137,88	
12	150	107,74	109,96	112,14	114,27	116,37	118,43	120,45	



## Stabox Type DS

### Shearing force parallel with the joint

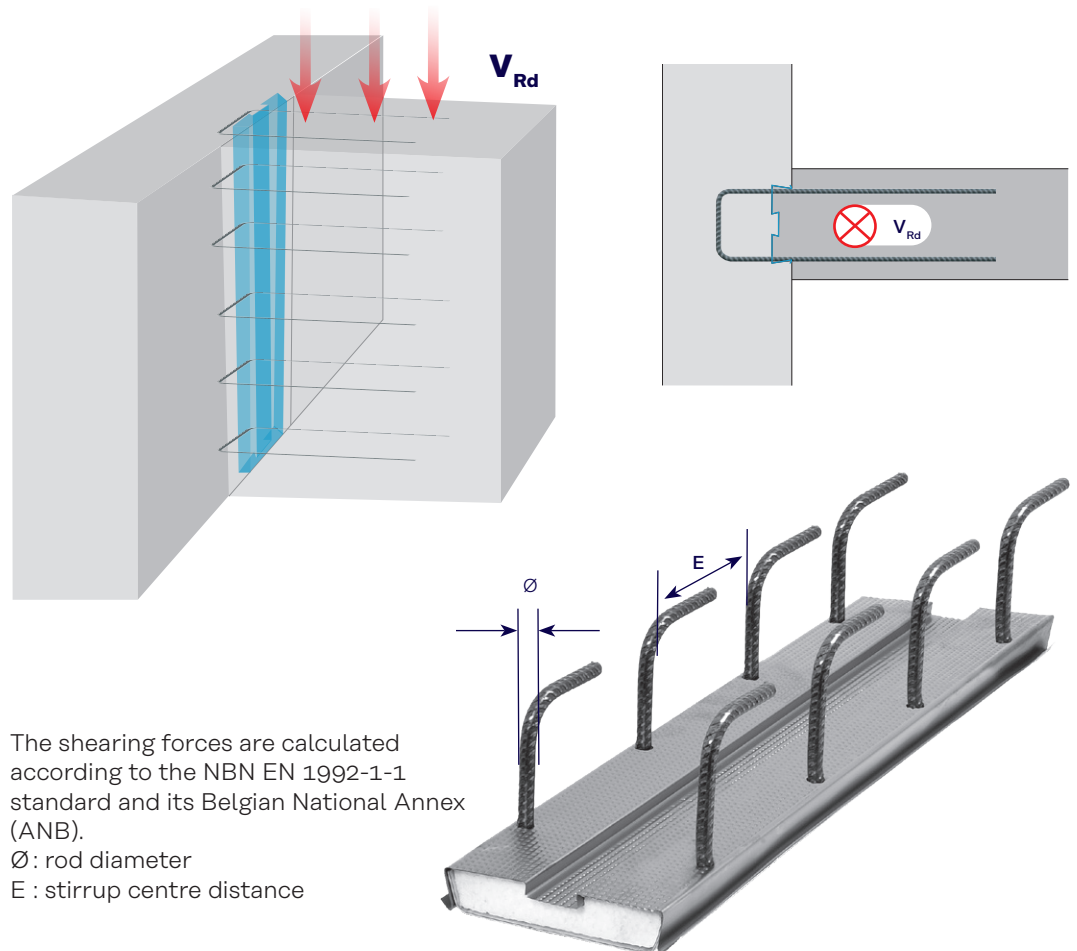

The shearing forces are calculated according to the NBN EN 1992-1-1 standard and its Belgian National Annex (ANB).  
 $\varnothing$  : rod diameter  
 E : stirrup centre distance

$V_{Rd}$  (kN/m)

C25/30					
$\varnothing$ (mm)	E (mm)	Type 120DS	Type 160DS	Type 190DS	Type 230DS
10	100	535,19	554,23	568,51	587,55
10	150	375,83	394,87	409,15	428,19
12	100	540,00	720,00	778,86	797,90
12	150	516,07	535,11	549,39	568,43

C30/37					
$\varnothing$ (mm)	E (mm)	Type 120DS	Type 160DS	Type 190DS	Type 230DS
10	100	542,87	564,47	580,67	602,27
10	150	383,51	405,11	421,31	442,91
12	100	633,60	774,82	791,02	812,62
12	150	523,75	545,35	561,55	583,15

# Contact Leviat worldwide

## Australia

98 Kurrajong Avenue,  
Mount Druitt, Sydney, NSW 2770  
Tel: +61 - 2 8808 3100  
Email: [info.au@leviat.com](mailto:info.au@leviat.com)

## Austria

Leonard-Bernstein-Str. 10  
Saturn Tower, 1220 Wien  
Tel: +43 - 1 - 259 6770  
Email: [info.at@leviat.com](mailto:info.at@leviat.com)

## Belgium

Industrielaan 2  
1740 Ternat  
Tel: +32 - 2 - 582 29 45  
Email: [info.be@leviat.com](mailto:info.be@leviat.com)

## China

Room 601 Tower D,  
Vantone Centre  
No. A6 Chao Yang Men Wai Street  
Chaoyang District  
Beijing P.R. China 100020  
Tel: +86 - 10 5907 3200  
Email: [info.cn@leviat.com](mailto:info.cn@leviat.com)

## Czech Republic

Pekařská 695/10a  
155 00 Praha 5  
Tel: +420 - 311 - 690 060  
Email: [info.cz@leviat.com](mailto:info.cz@leviat.com)

## Finland

Vädursgatan 5  
412 50 Göteborg / Sweden  
Tel: +358 (0)10 6338781  
Email: [info.fi@leviat.com](mailto:info.fi@leviat.com)

## France

Carré Pleyel  
5, Rue Pleyel  
93200 Saint Denis  
Tel: +33 (0)5 34 25 54 82  
Email: [info.fr@leviat.com](mailto:info.fr@leviat.com)

## Germany

Liebigstrasse 14  
40764 Langenfeld  
Tel: +49 - 2173 - 970 - 0  
Email: [info.de@leviat.com](mailto:info.de@leviat.com)

## India

Unit S4, 902, A Wing,  
Lodha iThink Techno Campus Building,  
Panchpakhadi, Pokharan Road 2,  
Thane, 400606  
Tel: +91-022 695 33700  
Email: [info.in@leviat.com](mailto:info.in@leviat.com)

## Italy

Via F.lli Bronzetti 28  
24124 Bergamo  
Tel: +39 - 035 - 0760711  
Email: [info.it@leviat.com](mailto:info.it@leviat.com)

## Malaysia

28 Jalan Anggerik Mokara 31/59  
Kota Kemuning,  
40460 Shah Alam Selangor  
Tel: +603 - 5122 4182  
Email: [info.my@leviat.com](mailto:info.my@leviat.com)

## Netherlands

Slachthuisweg 10  
7556 AX Hengelo  
Tel: +31 - 74 - 267 14 49  
Email: [info.nl@leviat.com](mailto:info.nl@leviat.com)

## New Zealand

246D James Fletcher Drive, Otahuhu,  
Auckland 2024  
Tel: +64 - 9 276 2236  
Email: [info.nz@leviat.com](mailto:info.nz@leviat.com)

## Philippines

27F Office A, Podium West Tower,  
12 ADB Avenue, Ortigas Center  
Mandaluyong City, 1550  
Tel: +63 - 2 7957 6381  
Email: [info.ph@leviat.com](mailto:info.ph@leviat.com)

## Poland

ul. Głogowska 151  
60-206 Poznań  
Tel: +48 - 61 - 622 14 14  
Email: [info.pl@leviat.com](mailto:info.pl@leviat.com)

## Singapore

10 Benoi Sector,  
Singapore 629845  
Tel: +65 - 6266 6802  
Email: [info.sg@leviat.com](mailto:info.sg@leviat.com)

## Spain

Poligono Industrial Santa Ana  
c/ Ignacio Zuloaga, 20  
28522 Rivas-Vaciamadrid  
Tel: +34 - 91 632 18 40  
Email: [info.es@leviat.com](mailto:info.es@leviat.com)

## Sweden

Vädursgatan 5  
412 50 Göteborg  
Tel: +46 - 31 - 98 58 00  
Email: [info.se@leviat.com](mailto:info.se@leviat.com)

## Switzerland

Grenzstrasse 24  
3250 Lyss  
Tel: +41 (0)800 22 66 00  
Email: [info.ch@leviat.com](mailto:info.ch@leviat.com)

## United Arab Emirates

RA08 TB02, PO Box 17225  
JAFZA, Jebel Ali, Dubai  
Tel: +971 (0)4 883 4346  
Email: [info.ae@leviat.com](mailto:info.ae@leviat.com)

## United Kingdom

President Way,  
President Park,  
Sheffield S4 7UR  
Tel: +44 - 114 275 5224  
Email: [info.uk@leviat.com](mailto:info.uk@leviat.com)

## USA / Canada

6467 S Falkenburg Road  
Riverview, FL 33578  
Tel: (800) 423-9140  
Email: [info.us@leviat.us](mailto:info.us@leviat.us)

For countries not listed  
Email: [info@leviat.com](mailto:info@leviat.com)

## Notes regarding this document

© Protected by copyright. The information in this publication is based on state-of-the-art technology at the time of publication. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Leviat shall not accept liability for the accuracy of the information in this document or for any printing errors. We reserve the right to make technical and design changes at any time. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

**Leviat®**

**Imagine. Model. Make.**

**[Leviat.com](https://Leviat.com)**