

## **TECHNICAL DATASHEET**


# PLAKA

# **PLAKA - VENTILMUR**

**Ventilation casing for brickwork outer leafs** REF 02.09.01 - Version V01 - 10/08/2020



## **Description**

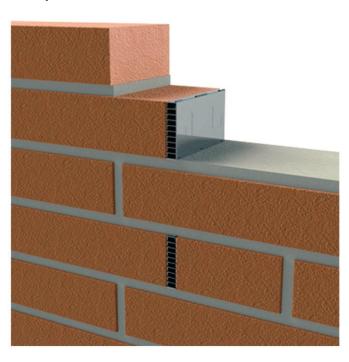



The plastic casing VENTILMUR guarantees a good ventilation of the cavity width of the cavity walls. This casing helps to stop the introduction of humidity from outside in the cavity.

In addition, it prevents some insects or other animals (mice, ...) to enter the cavity width through the open joints.

The VENTILMUR has also an aesthetic impact and gives an even visual impression of the façade. Small ribs on the bottom surface provide the anchoring into the mortar.

## **Application fields**

In open joints at the base of masonry walls and at the lintels.

### **Properties**

Mechanical properties				
Colour	Gray (standard)			
	White (on request)			
	Black (on request)			



# **TECHNICAL DATASHEET**

# PLAKA

## **PLAKA - VENTILMUR**

**Ventilation casing for brickwork outer leafs** REF 02.09.01 - Version V01 - 10/08/2020



### **Dimensions**

Dimensions - Materials						
Description	Reference code	Colour	units/Box	Kg/100		
	TIV	Gray	1	2,50		
	TIVB	White	500	2,50		
Dimensions standard(*) : 10 x 60 x 95 mm	TIVN	Black	500	2,50		

<sup>(\*)</sup> Other dimensions on request

### Installation

Position the VENTILMUR casing into the open joints of the brick cladding, the inclined strips being oriented to the outside and to the bottom (see sketch below)

